

TECHNICAL SPECIFICATIONS  
**HIAB X-HIPRO 418**




**BUILT TO PERFORM**




# HIAB X-HIPRO 418 BASIC DATA


TECHNICAL DATA	X-HIPRO 418EP-3	X-HIPRO 418EP-5
Max. lifting capacity (ft-lbs)	281 750	273 560
Outreach, hydraulic extensions (ft)	33' 10"	49' 6"
Outreach / lifting capacity (ft-lbs)	12' 6" - 22 050 14' 1" - 19 840 19' 8" - 14 110 26' 3" - 10 470 33' 6" - 8 160 -	12' 2" - 22 050 14' 9" - 18 520 20' 4" - 13 010 26' 11" - 9 480 34' 1" - 7 280 41' 8" - 5 840 49' 3" - 4 890
Outreach - lifting capacity, manual extensions (ft-lbs)	-	57' 1" - 4 060
Slewing angle (°)	∞	∞
Height in folded position (in)	97	97
Width in folded position (in)	99	99
Installation space needed (in)	54	55
Weight, "standard" crane without stabilizers (lbs)	7 790	8 640
Weight, stabilizer equipment (lbs)	1 010 - 1 210	1 010 - 1 210
Weight, jib (lbs)	-	-

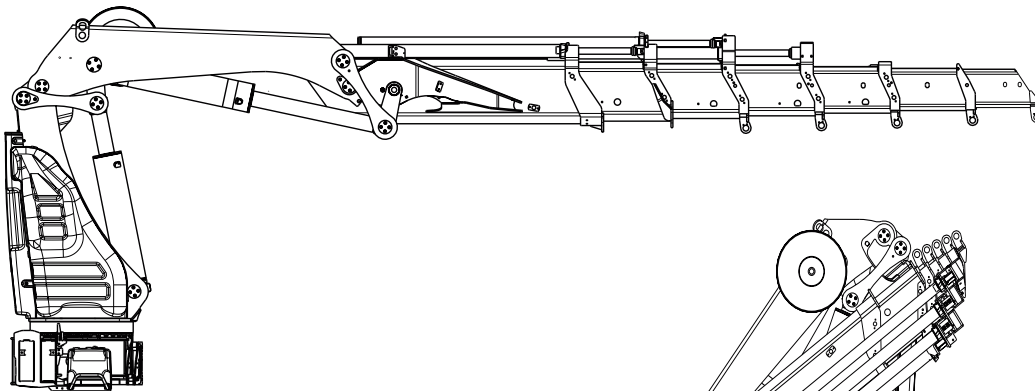

X-HiPro 418EP-5  
Side View



X-HiPro 418EP-5  
Front View

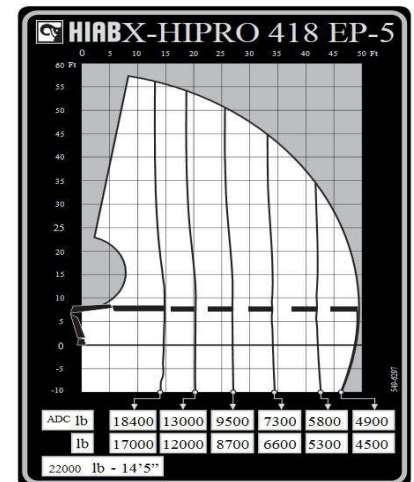

**Disclaimer.** Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE marked and comply with the European Standard EN12999.

Hiab is the world's leading provider of on-road load handling equipment. Our high performance product range includes loader cranes, forestry and recycling cranes, demountables, truck mounted forklifts and tail lifts. We aim to set the industry benchmark for customer satisfaction by providing products and services that meet customer needs globally.

www.hiab.us.com  
Hiab is part of Cargotec.  
www.cargotec.com

Hiab USA Inc  
12233 Williams Road  
Perrysburg, OH 43551 USA  
tel. +419 482 6000  
fax. +419 482 6001



V2017.09.08