

SST-40-EIH

Insulated Articulated/Telescopic Aerial Device



WORKING HEIGHT: Up to 45 ft 6 in (13.8 m)
HORIZONTAL REACH: Up to 27 ft 9 in (8.5 m)
PLATFORM CAPACITY: Up to 450 lbs (204 kg)

FULL PRESSURE
Hydraulic Controls

TALL PEDESTAL
with 25 gal Integral Reservoir

REVERSE MOUNT
for Chip Body Application

TruGuard®
Standard



SST-40-EIH model shown here.



VERSALIFT is a leading global manufacturer of bucket trucks, digger derricks, cable placers and other specialty equipment for use in the power generation, transmission and distribution, investor-owned utility, telecommunications, bridge inspection, light and sign, and forestry industries. Providing equipment sales, service, training, warranty and financing to government agencies, corporations, contractors, co-ops and municipalities through its global network of facilities and distributors, the company employs more than 900 employees worldwide.

SST-40-EIH

Insulated Articulated/Telescopic Aerial Device



GENERAL SPECIFICATIONS:

Horizontal Reach	27 ft 9 in (8.5 m)
Standard Platform Capacity	300 lbs (136 kg)
Maximum Platform Capacity	450 lbs (204 kg)

WITH 53 IN PEDESTAL:

(Based on 40 in Frame)

Height to Bottom of Platform	40 ft 6 in (12.3 m)
Working Height	45 ft 6 in (13.8 m)
Stowed Travel Height	11 ft 3 in (3.4 m)

HYDRAULIC SYSTEM:

Operating Pressure	2250 psi (155 bar)
Flow Rate	3 gpm (11 lpm)
Filtration	10 micron return 100 mesh suction
System Type	Open Center

BOOM ACTION:


Inner Boom Extension	116 in (2.9 m)
Outer Boom	-14° to +74°
Lower Boom	-5° to Vertical
Rotation	370° Non-Continuous

INSULATION GAP:

Upper Boom Fully Retracted	42 in (1.07 m)
Lower Boom Insert (optional)	12 in (0.3 m)
Upper Boom Fully Retracted w/o Electroguard	10 in (.25 m)

OPTIONS:

- 4-Axis Control System
- 180° Rotating Platform
- Hydraulic Tool Circuit at the Platform
- Two-Speed Throttle Control
- Automatic Boom Latch
- Lift Eye (500 lb max)
- Continuous Rotation
- Backup 12-Volt Pump
- Independent Outriggers
- Rear Torsion Bars
- Full Hydraulic Controls Below Rotation

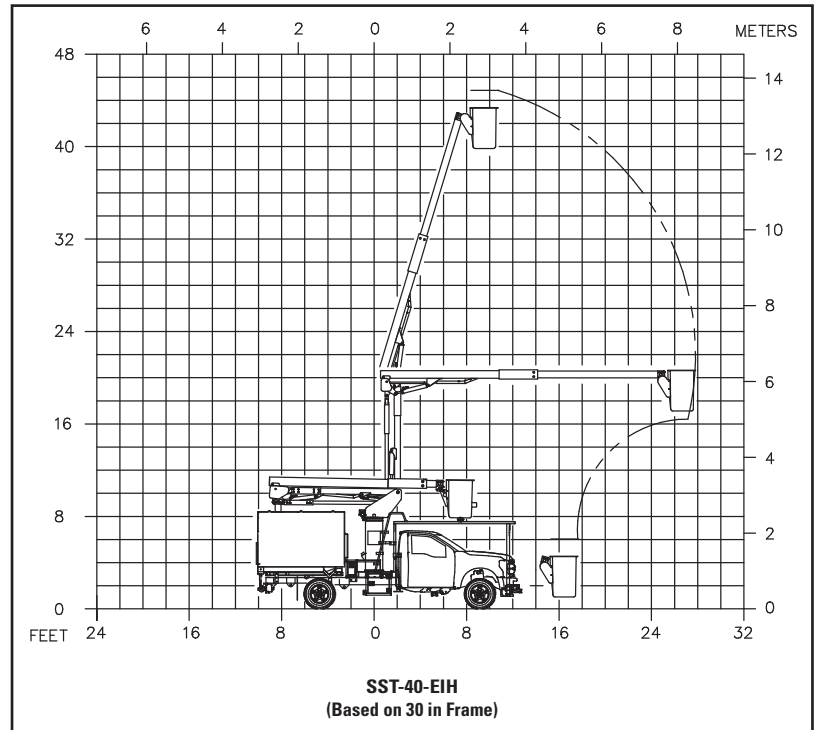

Note: Specifications on units may vary or change without prior notifications due to option selections.

REV. 02/19



| 7601 Imperial Drive | Waco, Texas 76712 | 254.399.2100 | VERSALIFT.com