

# McNeilus

## STANDARD MIXER WITH STANDARD DRUM



### High performance meets low maintenance with the McNeilus Standard Mixer with options to meet your specific needs.

- McNeilus FLEX Controls provide better, more precise control with one of the most advanced systems in the industry
- Strategically positioned head impeller to provide a homogenous mix in dry batch applications
- One piece spun head design
- Extensive option catalog with lightweight, heavy-duty and operator assurance add-ons allows you to fully customize your mixer to meet your application's needs

### Model Year Updates

- McNeilus FLEX Controls cable version (EP version optional)
- Improved fender design to increase durability and corrosion resistance, lightweight aluminum option available
- Simplified and enclosed chute lock design to protect components from debris
- Increased fin spiral rebar thickness to lengthen fin life
- Access hole added to front pedestal for easy maintenance

### BODY

Body Capacity	11 cu yd
Discharge Opening	42 in
Drum Transmission	PMP PMB7.1
Head Thickness	1/4 in
Skin Thickness	3/16 in
Fin Thickness	3/16 in
Surge Fins	Bolted
Hatch	One, bolted

### MAIN CHUTE

Length	5 ft
Chute Material	Steel

### FOLD-OVER CHUTES AND EXTENSIONS

Lift	Hydraulic-driven
Lock	Air lock
Length	Transitional 30 in
Extension 1	4 ft
Extension 2	4 ft

### WATER SYSTEM

Tank	Steel, 125 gallon
Water Valves	Standard ball valves

### HYDRAULICS

Pump	Eaton 54 Series
Motor	Eaton 54 Series
Reservoir	Nylon
Reservoir Mounting	Inside of pedestal

### CONTROLS

Drum Control Type	FLEX Controls Cable
Cab Configuration	Cable controls

### FENDERS

Skin Material	Steel
Mud Flaps	White plastic

### PAINT

Drum and components steel shot blasted prior to priming with high solids epoxy primer

Standard Finish: One color (white), Sikken's Autocoat BT LV650 Topcoat, a high performance, high solids polyurethane

### LIGHTING

LED lights standard  
3-bar light located on charge hopper

### POPULAR OPTIONS

■ FLEX Controls	■ Split PTO cover
■ Washout System	■ 46 in. paver discharge opening
■ Aluminum water tank	■ ZF drum drive
■ Back up camera	■ Enviroguard washout
■ Lightweight chutes	■ Chute wash recovery system
■ Flip-up hopper	■ Rock buster or chute shutter
■ SAT hopper	■ Tow recovery hook
■ Head impeller (lined/unlined)	


### MCNEILUS WARRANTIES

Contact your McNeilus representative on warranty details. For more information, go to [www.mcneiluscompanies.com](http://www.mcneiluscompanies.com)

# STANDARD MIXER WITH STANDARD DRUM

- Industry's best factory-direct service and support network, with mobile service trucks ready to answer your call
- McNeilus CNG (Compressed Natural Gas) systems available on a range of chassis choices and engine configurations
- Highest-quality abrasion-resistant steel in all high-wear areas for added strength and durability
- Proudly made in the USA

SIDE VIEW

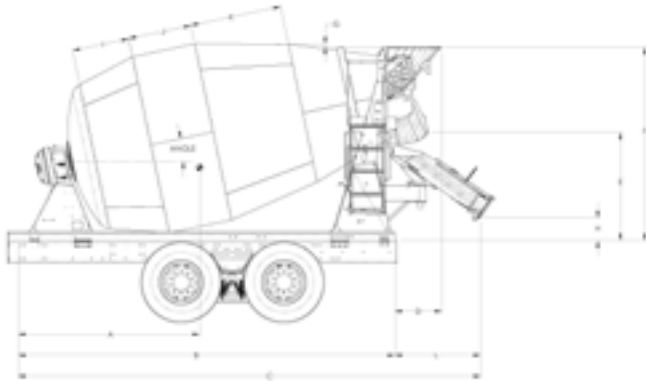

SIZE		STD APPROX. WT.		DRUM VOLUME		STD DRUM ANGLE	
YD <sup>3</sup>	M <sup>3</sup>	Lbs	Kg	FT <sup>3</sup>	M <sup>3</sup>	42 in°	46 in Paver°
7.0	5.35	6763	3068	309	8.75	14.4	-
7.5	5.73	6883	3122	333	9.43	13.7	-
8.0	6.12	7313	3317	355	10.05	13.1	-
8.5	6.50	7458	3383	380	10.76	12.4	-
9.0	6.88	7563	3431	403	11.41	12.4	12.9
9.5	7.26	7690	3488	426	12.06	13.4	12.4
10.0	7.65	7818	3546	450	12.74	12.9	13.6
10.5	8.03	7943	3603	473	13.39	12.4	13.1
11.0	8.41	8068	3660	497	14.07	12.0	12.6
12.0	9.17	9383	4256	544	15.40	12.5	-

## STANDARD DRUM (42 IN. OPENING)

SIZE (YD)	A (IN)	B (IN)	C (IN)	D (IN)	E (IN)	F (IN)	G (IN)	H (IN)	I (IN)	J (IN)	K (IN)	L (IN)
7.0	73.1	158.4	203.1	24.6	45.5	96.0	0.9	7.0	23.3	9.0	39.1	44.7
7.5	76.5	164.6	209.3	24.6	45.3	96.3	1.2	7.0	23.3	15.4	39.1	44.7
8.0	79.9	171.5	216.2	25.4	45.1	96.8	1.7	7.0	23.3	21.5	39.1	44.7
8.5	83.3	178.5	223.2	26.5	45.0	97.3	2.2	7.0	23.3	28.1	39.1	44.7
9.0	85.8	180.7	225.7	26.2	46.5	98.8	2.2	8.5	30.0	15.8	48.2	45.0
9.5	89.0	187.1	232.9	24.2	50.8	98.8	1.5	12.5	30.0	21.5	48.2	45.8
10.0	92.4	193.0	238.8	25.3	50.7	101.9	1.9	12.5	30.0	27.5	48.2	45.8
10.5	95.8	198.9	244.7	25.3	50.6	101.9	2.2	12.5	30.0	33.4	48.2	45.8
11.0	99.2	204.7	250.5	25.3	50.5	101.9	2.8	12.5	30.0	39.3	48.2	45.8
12.0	96.0	215.7	262.7	29.5	53.0	106.0	5.0	11.0	30.0	50.9	48.2	47.0

## STANDARD PAVER DRUM (46 IN. OPENING)

SIZE (YD)	A (IN)	B (IN)	C (IN)	D (IN)	E (IN)	F (IN)	G (IN)	H (IN)	I (IN)	J (IN)	K (IN)	L (IN)
9.0	85.7	178.9	223.6	22.7	45.1	100.9	0.0	7.0	30.0	15.8	48.2	44.7
9.5	89.1	184.8	229.5	22.7	45.0	100.9	0.0	7.0	30.0	21.5	48.2	44.7
10.0	92.3	190.4	236.2	23.5	50.7	105.9	0.0	12.5	30.0	27.5	48.2	45.8
10.5	95.7	196.3	242.1	23.5	50.6	105.9	0.0	12.5	30.0	33.4	48.2	45.8
11.0	99.1	202.2	248.0	23.5	50.5	105.9	0.0	12.5	30.0	39.3	48.2	45.8



We offer a complete line of parts and services for all makes and models.  
View and purchase at [www.StreetSmartParts.com](http://www.StreetSmartParts.com) or call 888.686.7278.

Learn more at [www.mcneiluscompanies.com](http://www.mcneiluscompanies.com)

© April 2017 McNeilus Truck & Manufacturing, Inc. McNeilus and the McNeilus logo are trademarks of McNeilus Truck & Manufacturing, Inc., Dodge Center, MN, USA. All other designated trademarks are the property of their respective owners. Specifications, descriptions and illustrations in this brochure are accurate as shown at the time of publication, but are subject to change without notice. Illustrations may include optional equipment and accessories and may not include all standard equipment.